


R / 11

Dla rur o małej średnicy
i płyt sitowych średnio
grubych




$RE_{min} = 1/4" (6,3 \text{ mm})$

$RE_{max} = 1.1/4" (31,8 \text{ mm})$

Rolki	STD		DLS		DLX	
	L_t		L_u		L_d	
	cale	mm	cale	mm	cale	mm
037-S ÷ 023-S	0.708	18,0	0.630	16,0	0.551	14,0
022-S ÷ 017-S	0.787	20,0	0.708	18,0	0.630	16,0
016-S ÷ 09-S	0.905	23,0	0.787	20,0	0.669	17,0

Przykład kodu rozwałcówki, który należy
podać przy zamówieniu



STD

DLS

DLX

$d_e 3/8" - 20 \text{ B.W.G.}$

R11.0 -019

R11.0 -019-DLS

R11.0 -019-DLX- L_x




Kołnierz oporowy

Pełny, bez
wpustu



Rura		Zakres rozwałcowania				Rozwałcówka		Rolki	Trzpień	Zalecany napęd			
d_e	sp	d_i								Elektr.	Pneumat.		
cale mm	cale mm	mm	cale	mm	cale	mm	NR.	NR.	NR.				
1/4" (6,3)	19	0,042	1,07	0,158	4,0	0.149 ÷ 0.173	3,8 ÷ 4,4	R11.0-037	037-S	1-037 ÷ 036		F90 + MP/4	Minirol 2100
				0,166	4,1	0.158 ÷ 0.181	4,0 ÷ 4,6	R11.0-036	036-S				
				0,169	4,3	0.165 ÷ 0.189	4,2 ÷ 4,8	R11.0-035	035-S				
				0,180	4,5	0.173 ÷ 0.205	4,4 ÷ 5,2	R11.0-034	034-S				
				0,186	4,7	0.181 ÷ 0.212	4,6 ÷ 5,4	R11.0-033	033-030-S				
	20	0,035	0,89	0,180	4,5	0.173 ÷ 0.205	4,4 ÷ 5,2	R11.0-034	034-S	1-035 ÷ 031			
					4,7	0.181 ÷ 0.212	4,6 ÷ 5,4	R11.0-033	033-030-S				
					4,9	0.189 ÷ 0.220	4,8 ÷ 5,6	R11.0-032/A	032/A-029-S				
					5,0	0.197 ÷ 0.228	5,0 ÷ 5,8	R11.0-031/A	031/A-028-S				
					5,2	0.205 ÷ 0.236	5,2 ÷ 6,0	R11.0-030	033-030-S				
21	0,032	0,81	0,186	4,7	0.181 ÷ 0.212	4,6 ÷ 5,4	R11.0-033	033-030-S	1-035 ÷ 031				
				4,9	0.189 ÷ 0.220	4,8 ÷ 5,6	R11.0-032/A	032/A-029-S					
				5,0	0.197 ÷ 0.228	5,0 ÷ 5,8	R11.0-031/A	031/A-028-S					
				5,2	0.205 ÷ 0.236	5,2 ÷ 6,0	R11.0-030	033-030-S					
				5,4									
22	0,028	0,71	0,194	4,9	0.197 ÷ 0.228	5,0 ÷ 5,8	R11.0-031/A	031/A-028-S	1-030 ÷ 026				
				5,0	0.205 ÷ 0.236	5,2 ÷ 6,0	R11.0-030	033-030-S					
				5,2									
				5,4									
				5,6									
23	0,025	0,64	0,200	5,0					1-030 ÷ 026				
				5,2									
				5,4									
				5,6									
				5,8									
24	0,022	0,56	0,206	5,2					1-030 ÷ 026				
				5,4									
				5,6									
				5,8									
				6,0									
28	0,014	0,35	0,222	5,6					1-030 ÷ 026				
				5,8									
				6,0									
				6,2									
				6,4									
30	0,012	0,30	0,226	5,7					1-030 ÷ 026				
				5,8									
				6,0									
				6,2									
				6,4									

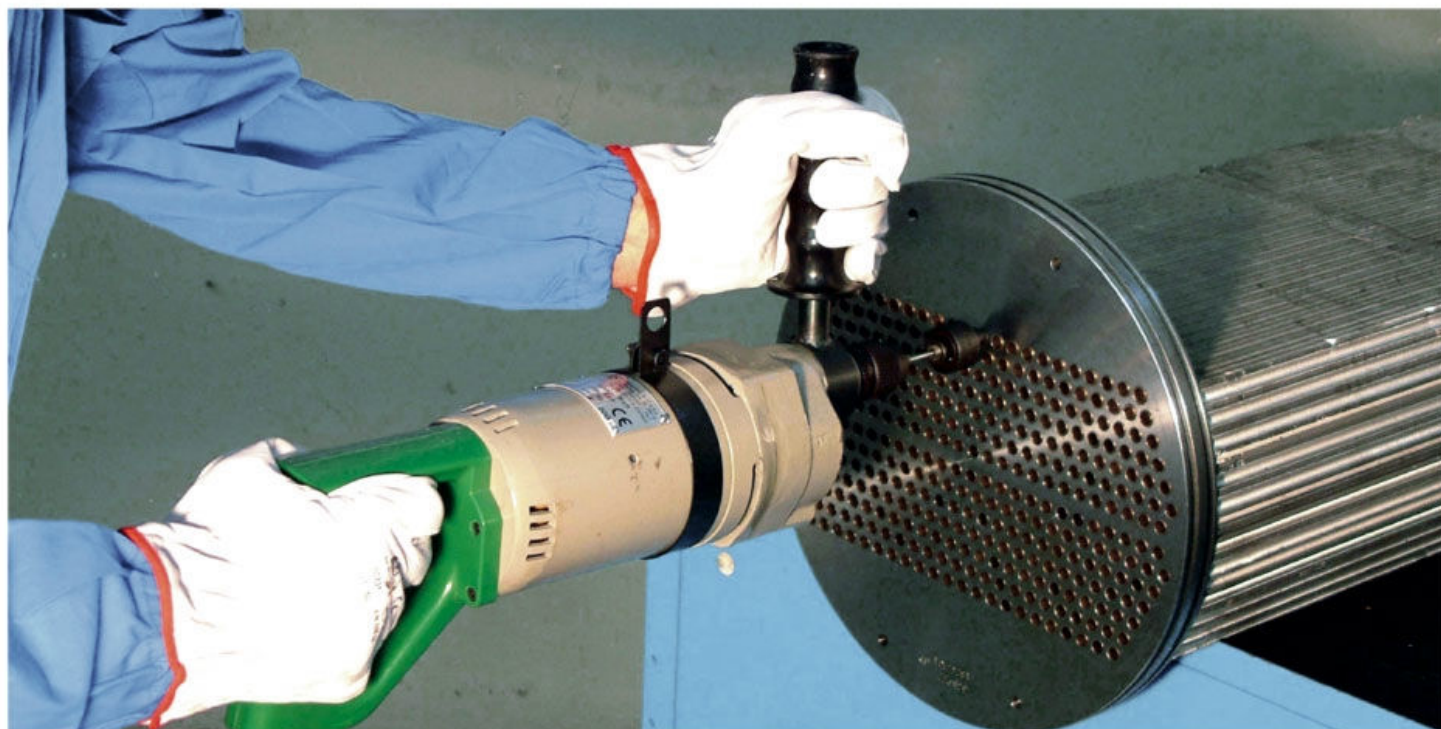

Rura		Zakres rozwałcowania		Rozwałcówka		Rolki		Trzpień		Napęd			
d_e	g	d_i								Elektr.	Pneumat.		
cale mm	cale mm	mm	cale mm	cale mm	cale mm	NR.	NR.	NR.	cale mm				
3/8" (9,5)	14	0.083	2,11	0.205	5,2	0.197÷0.228	5,0 ÷ 5,8	R11.0-031/A-M	031/A-028-S	1-035 ÷ 031	1/4" (6.3)	F90 + MP/3	Minirol 1300
				0.209	5,3	0.205÷0.236	5,2 ÷ 6,0	R11.0-030-M	033-030-S				
				0.220	5,6	0.212÷0.244	5,4 ÷ 6,2	R11.0-029	032/A-029-S				
	15	0.072	1,83	0.231	5,8	0.220÷0.251	5,6 ÷ 6,4	R11.0-028	031/A-028-S	1-030 ÷ 026			
				0.236	6,0	0.228÷0.260	5,8 ÷ 6,6	R11.0-027	027-025-S				
				0.245	6,2	0.236÷0.268	6,0 ÷ 6,8	R11.0-026	026-024-S				
	16	0.065	1,65	0.252	6,4	0.244÷0.275	6,2 ÷ 7,0	R11.0-025	027-025-S				
				0.259	6,5	0.252÷0.286	6,4 ÷ 7,2	R11.0-024	026-024-S	1-025 ÷ 023			
				0.268	6,8	0.260÷0.291	6,6 ÷ 7,4	R11.0-023	023-S				
	17	0.058	1,47	0.277	7,0	0.268÷0.309	6,8 ÷ 7,8	R11.0-022	022-S	1-022 ÷ 021			
				0.291	7,3	0.275÷0.315	7,0 ÷ 8,0	R11.0-021	021-S				
				0.295	7,5	0.286÷0.323	7,2 ÷ 8,2	R11.0-020	020-S	1-020 ÷ 019			
1/2" (12,7)	18	0.049	1,24	0.305	7,7	0.291÷0.331	7,4 ÷ 8,4	R11.0-019	019-S		1/4" (6.3)	F90 + MP/2 MS/80	Minirol 2100
				0.311	7,9	0.300÷0.338	7,6 ÷ 8,6	R11.0-018	018-S	1-018 ÷ 017			
				0.319	8,1	0.307÷0.346	7,8 ÷ 8,8	R11.0-017-M	017-S				
	19	0.042	1,07	0.325	8,2	0.315÷0.362	8,0 ÷ 9,2	R11.0-016-M	016-S	1-016 ÷ 012			
				0.331	8,4	0.323÷0.370	8,2 ÷ 9,4	R11.0-015-M	015-S				
				0.334	8,5	0.323÷0.370	8,2 ÷ 9,4	R11.0-015	015-S				
	15	0.072	1,83	0.342	8,7	0.331÷0.378	8,4 ÷ 9,6	R11.0-014	014-S	1-016 ÷ 012			
				0.356	9,0	0.338÷0.386	8,6 ÷ 9,8	R11.0-013	013-S				
				0.362	9,2	0.346÷0.394	8,8 ÷ 10,0	R11.0-012	012-011-S				
	16	0.065	1,65	0.370	9,4	0.354÷0.409	9,0 ÷ 10,4	R11.0-011	012-011-S	1-011 ÷ 09			
				0.374	9,5	0.362÷0.417	9,2 ÷ 10,6	R11.0-010	010-S				
				0.384	9,7	0.370÷0.425	9,4 ÷ 10,8	R11.0-09	09-S				